

SKOBIFIX® WDVS XXs 30

Prefab chimney shaft 150x200 mm
for External Thermal Insulation Composite System (ETICS)

Order/enquiry form 2021

Description and brief explanation:

The overview diagram (Right) shows the assembled structure of the SKOBIFIX® WDVS XXs 30 prefab shaft. The shaft comprises the following parts:

- 1 1m interlocking chimney shaft block, containing integral PPs flue D80 including bracing brackets
- 2 Bypass shaft element, 250mm height with ventilation grille for supply air, incl. PPs flue pipe D80 (Required for shaft heights over 5 m)
- 3 Patented connection element with bend 87°/ D80/125, incl. 2 angle brackets
- 4 Stack pack, comprising roof terminal, with options of pitched roof tile 25–45°, 5–25°, 35–55° or flat flashing
- 5 SKOBIFIX special adhesive in 3 kg tub
- 6 Wall bracket
- 7 Support clamp

The interlocking shaft blocks **1** are 1 metre in length. The bypass shaft element **2** with ventilation grille for supply air has a height of 250 mm. It is only to be provided for shaft heights of more than 5m.

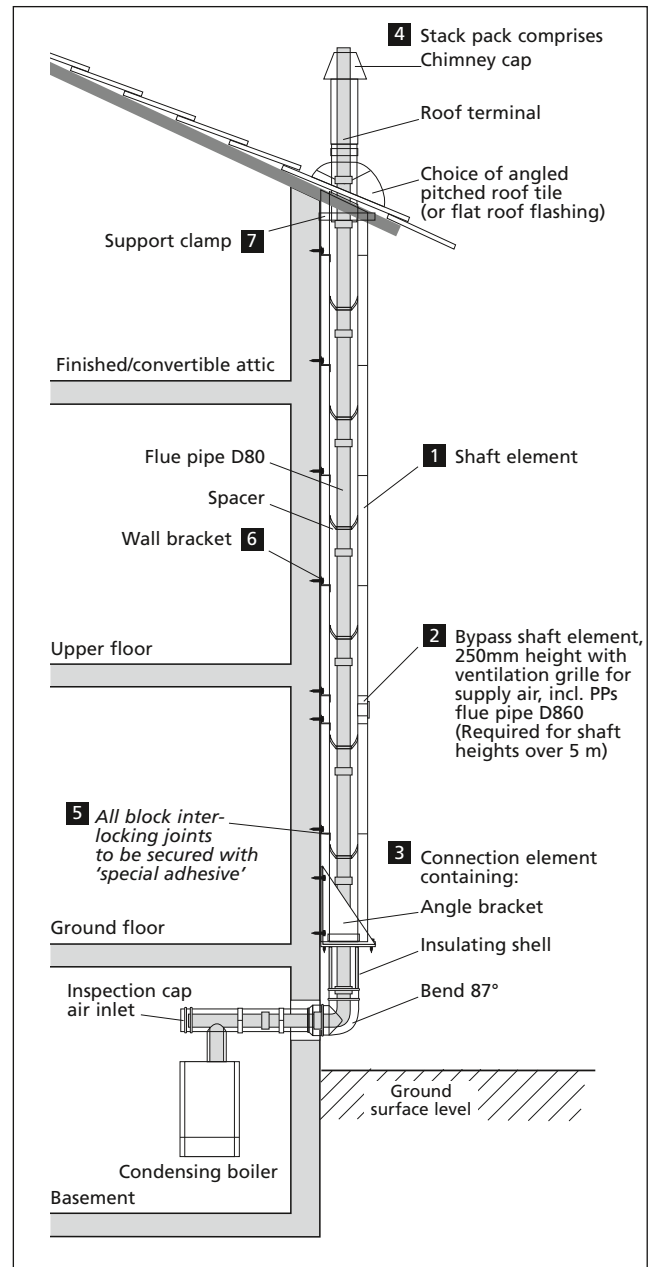
One ceiling connection adapter **3** and one stack pack **4** is required for each chimney shaft. Appropriate option should be selected for flat roof, or pitch of roof, height above roof and colour required.

A 3 kg tub of special adhesive **5** is sufficient to secure approx. 10 off interlocking chimney shaft block joints.

Each shaft element should be fastened at the facade with a wall bracket **6**. The top shaft element should be fastened with a support clamp **7** at the rafters.

Delivery conditions








The prices are given per unit exclusive of local value-added tax and delivery costs. Non-exchanged EURO DIN palettes will be calculated at 13 EUR. We will deliver to an accessible unloading point. Unloading is not included. The customer must assume responsibility for unloading the goods.



Latest revision: January 2021 (Subject to technical changes)

Order/enquiry form 2021

Buyer (Name/Company)	Order number
Customer ID	Commission no.
<input type="checkbox"/> Enquiry <input type="checkbox"/> Order	Delivery address
Delivery date	

Article spec./description	Item-no.	Amount	EUR/unit	
1 Shaft block 1,000 mm incorporating PPs flue D80, bracing brackets	730000			 <p>PPs pipe D80 Bracing bracket Schachtelement Shaft block</p>
2 Bypass shaft element, 250mm height with ventilation grille for supply air, incl. PPs flue pipe D80 (Required for shaft heights over 5 m)	730036			
3 Patented connection element with bend 87°, D80/125, powder coated, white, incl. 2 angle brackets and screw set	730035			 <p>Angle brackets Connecting element Insulation shell Bend 87°</p>
4 Stack packs:				
Stack pack with roof terminal 0.4 m, pitched roof tile 25–45°, 600x700 mm, black	730006			 <p>Chimney cap PPs top flue pipe D80, black Roof terminal pipe Detachable connection Adjustable rain shield collar</p> <p>Pitched roof tile 25°–45°</p> <p>or flat roof collar</p>
ditto in terracotta	730007			
Stack pack with roof terminal 1.0 m, pitched roof tile 25–45°, 600x700 mm, black	730008			
ditto in terracotta	730009			
Stack pack with roof terminal 0.4 m, flat flashing, black	730010			
Stack pack with roof terminal 1.0 m, flat flashing, black	730012			
5 SKOBIFIX special adhesive 3 kg tub	710007			
6 Set of wall brackets (3 pc with screw set)	730037			
7 Support bracket (2-piece)	730004			
SKOBIFIX builder's saw	710069			
Sum				
Freight cost				
Total				

Latest revision: January 2021, Subject to technical changes. Art.-Nr. 791065_WEB EN